


CEMA LED Round Pendant Hi-bays with die cast aluminium body and SMD LEDs, are ideal for higher ceiling applications in warehouses, general manufacturing and general task areas

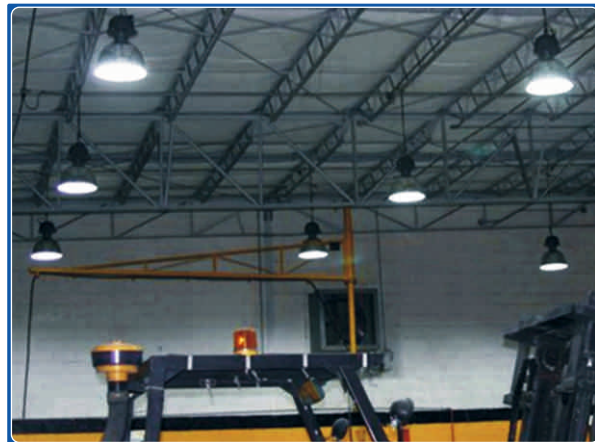

Wattage	40W	80W	90W	100W
Lumens	5200	10400	11700	13000
Beam Angle	120°	120°	120°	120°
CCT	6500°K	6500°K	6500°K	6500°K
Input Vg (AC)	220-240V	220-240V	220-240V	220-240V
Power Factor	>0.95	>0.95	>0.95	>0.95
CRI	>80	>80	>80	>80
THD	<10%	<10%	<10%	<10%
Dimension(mm)	515 dia	376 dia	376 dia	376 dia

Protections


- Over Voltage
- Short Circuit
- Surge Protection
- Reverse Polarity
- I/P & O/P Over Voltage
- I/P Under Voltage
- I/P Fuse
- Thermal Cutoff

Applications

- ROAD WAY
- GARDEN
- INDUSTRY
- AREA LIGHTING

Note : Specifications & Dimensions are subject to change without prior notice

CEMA LED Round Pendant Hi-bays with die cast aluminium body and SMD LEDs, are ideal for higher ceiling applications in warehouses, general manufacturing and general task areas

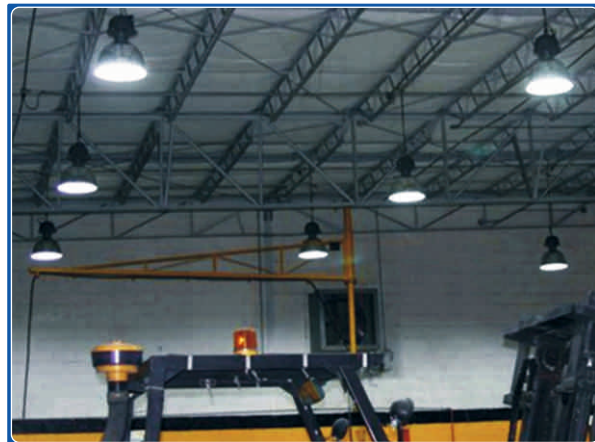

Wattage	150W	200W
Lumens	15600	19500
Beam Angle	120°	120°
CCT	6500°K	6500°K
Input Vg (AC)	220-240V	220-240V
Power Factor	>0.95	>0.95
CRI	>80%	>80%
THD	<10%	<10%
Dimension(mm)	376 dia	376 dia

Protections

- Over Voltage
- Short Circuit
- Surge Protection
- Reverse Polarity
- I/P & O/P Over Voltage
- I/P Under Voltage
- I/P Fuse
- Thermal Cutoff

Applications

● ROAD WAY ● GARDEN ● INDUSTRY ● AREA LIGHTING

Note : Specifications & Dimensions are subject to change without prior notice